

These opening control devices can only be installed if secondary vent stops are already installed in the upper sash (fixed or operating) or if a new upper sash (applies to double-hung windows only) is ordered with cutouts. Thoroughly read these instructions and understand the operation of these devices. Failure to properly install devices may allow window to open unexpectedly allowing falls through the window.

Provide the safety and operating instructions to the homeowner and occupant after installation is complete. Contact us for additional copies if needed.

The window opening control device is designed to limit the opening of the window, and must be installed so that objects no larger than a 4" rigid sphere will fit through the opening. This is to protect against accidental falls from an open window, but is not a substitute for traditional safety practices.

IMPORTANT SAFETY INFORMATION

- Train all occupants six (6) years old and older to operate the release mechanism in case of an emergency.
- The window opening control device engages automatically when the window is closed.
- Check for re-engagement of window opening control device after each release.
- Test once a month for proper operation and inspect for damage. Replace device promptly if necessary.
- Make sure the device is properly installed, engaged, and operated as specified. Do not modify the device in any way.

- Consult local building and fire codes before installing this device; contact local building code department or fire department for specific codes. Install device such that the release mechanism(s) is in conformance with local building and fire code requirements.

⚠ WARNING
Possible Fall Hazard

- Young children may fall out of the window if this device is not installed correctly. Install the device so that a rigid 4.0-in.-diameter sphere does not pass through any space in the window opening after the device is in place.
- Young children may fall out the window if all installation instructions are not followed:
 - Use recommended materials and techniques.
 - Make sure the fall prevention device is securely attached to the window frame.
 - Make sure that the window frame is in good condition.

INSTALLATION

Tools required:

- Flat head screwdriver


Kit includes:

- 2 - Opening Control Devices


1. Fully close window.

Skip step 2 if installing devices in a new upper sash with open holes.

2. Pry the top of the secondary vent stops or old opening control devices from the window and remove from both sides.

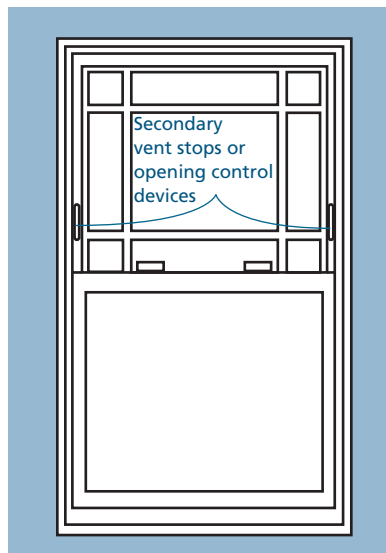

3. With the wide part of the catch down, put the bottom in first and then press the top of the device into the secondary vent stop cavity until it snaps into place. Repeat for other side.
4. Operate window and verify device performs correctly. Immediately fix any problems.

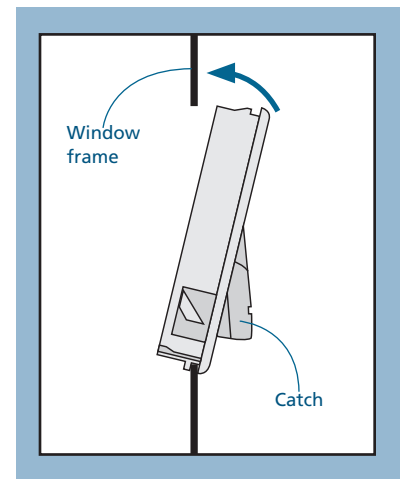

The information contained herein is provided solely for informational and/or educational purposes. JELD-WEN disclaims any and all liability associated with the use and/or provision of this information. Any reliance upon the information or advice is at the risk of the party so relying. The information contained herein may be changed from time to time without notification.